



● Každý elektrický ohřev EOVP:

- Využívá převod el. energie na energii tepelnou
- Je vyroben z vysoce kvalitního PVC
- Má topnou patronu vyrobenou z nerez materiálu INCOLOY 800, jenž zaručuje tu nejlepší kvalitu
- Je 100 % testován na těsnost
- Může být připojen na vodní okruh lepením 50 mm
- Je vybaven termostatem do 40 °C a tepelnou pojistkou
- Je vybaven průtokovou el. klapkou, která kontroluje průtok vody
- Je vybaven 2 ks držáky pro snadné upevnění

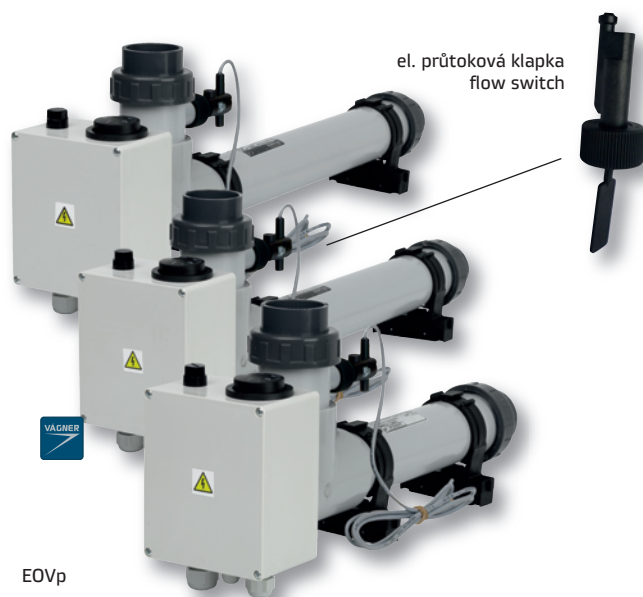

● Every EOVP electrical water-flow heater:

- Uses the transfer of electrical energy into thermic energy
- Is made of high quality PVC
- Has a heating element made from stainless material INCOLOY 800 ensuring the highest quality
- Is 100 % tested for tightness
- Can be attached to water circuit via gluing 50 mm
- Is provided with a thermostat for up to 40 °C and thermic fuse
- Is equipped with el. flow switch controlling the water flow
- Includes 2 brackets for an easy attachment

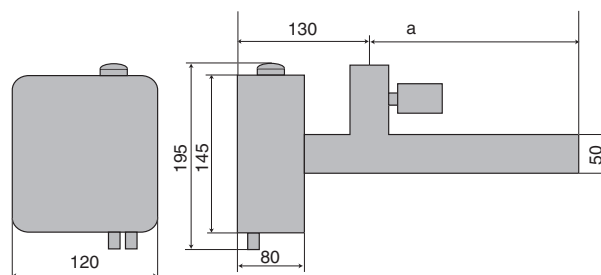

Typ/type	kW	* A 1f / 3f	V	a [mm]	napojení connection
EOVP-3-V 1f/3f	3	16 / 10	230/400	355	50 mm
EOVP-6-V 1f/3f	6	32 / 16	230/400	355	50 mm
EOVP-9-V 1f/3f	9	50 / 20	230/400	495	50 mm
EOVP-12-V 3f	12	25	400	495	50 mm
EOVP-15-V 3f	15	32	400	570	50 mm
EOVP-18-V 3f	18	32	400	570	50 mm

* Doporučené min. jistiění / Recommended min. safety fuse

Topení EOVP Heater EOVP							
5801103	C	EOVP-3, 3 kW, 3 x 230 V, plast s el. průtokovou klapkou EOVP-3, 3 kW, 3 x 230 V, plastic, with flow switch			3,35	8 050,-	€
5801106	C	EOVP-6, 6 kW, 400 V, plast s el. průtokovou klapkou EOVP-6, 6 kW, 400 V plastic, with flow switch			3,45	8 100,-	
5801109	C	EOVP-9, 9 kW, 400 V, plast s el. průtokovou klapkou EOVP-9, 9 kW, 400 V plastic, with flow switch			3,80	8 250,-	
5801112	C	EOVP-12, 12 kW, 400 V, plast s el. průtokovou klapkou EOVP-12, 12 kW, 400 V, plastic with flow switch			3,90	8 330,-	
5801115	C	EOVP-15, 15 kW, 400 V, plast s el. průtokovou klapkou EOVP-15, 15 kW, 400 V, plastic with flow switch			4,25	8 500,-	
5801118	C	EOVP-18, 18 kW, 400 V, plast s el. průtokovou klapkou EOVP-18, 18 kW, 400 V, plastic with flow switch			4,35	8 580,-	

Doporučený výkon topení s ohledem na velikost bazény.

Recommended performance of heating with respect to the size of the pool.



Množství vody v bazénu Water quantity in pool			
10 m ³	3 kW	13 kW	4,5 kW
20 m ³	6 kW	28 kW	4,5–5,5 kW
30 m ³	9 kW	38 kW	8,2–9 kW
40 m ³	12 kW	38 kW	9–12 kW
50 m ³	12–15 kW	53 kW	12–16 kW
60 m ³	15 kW	53 kW	16 kW
70 m ³	15–18 kW	73 kW	23 kW
80 m ³	18 kW	73 kW	23 kW
90 m ³	18 kW	88 kW	23 kW
100 m ³	2 x 12 kW	88 kW	23–30 kW
120 m ³	2 x 15 kW	120 kW	30 kW
150 m ³	2 x 18 kW	145 kW	30 kW