



Operating Manual

Model: D 750

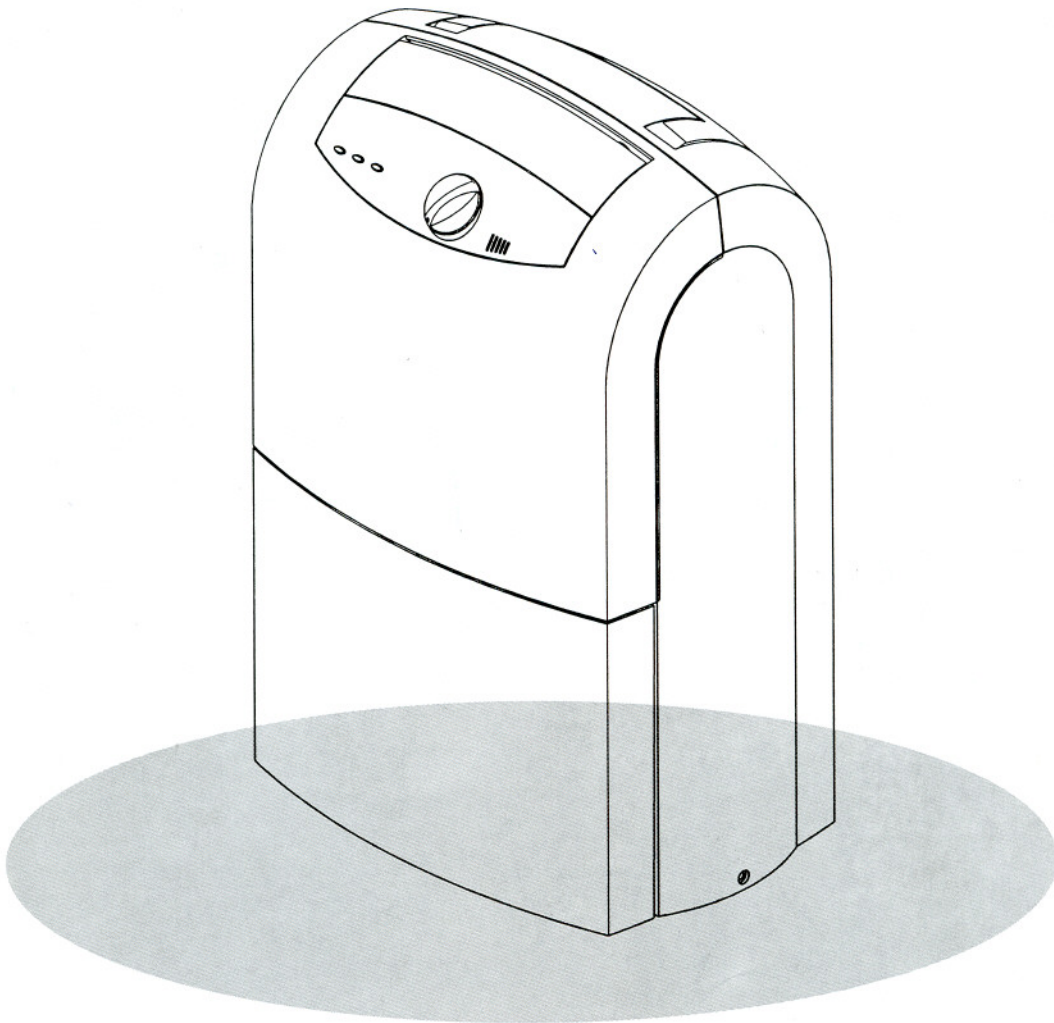


Caution: Operate only with 220-240V, 50Hz current


Component

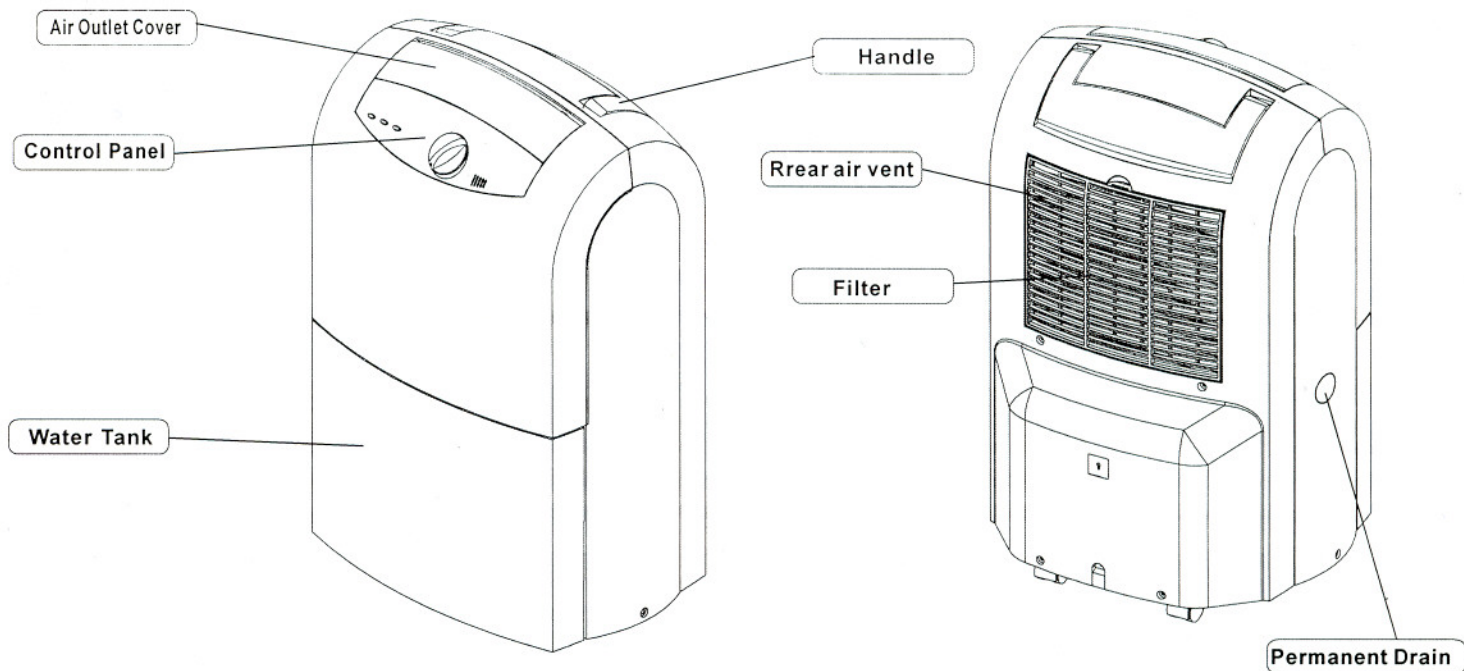

Operating guide

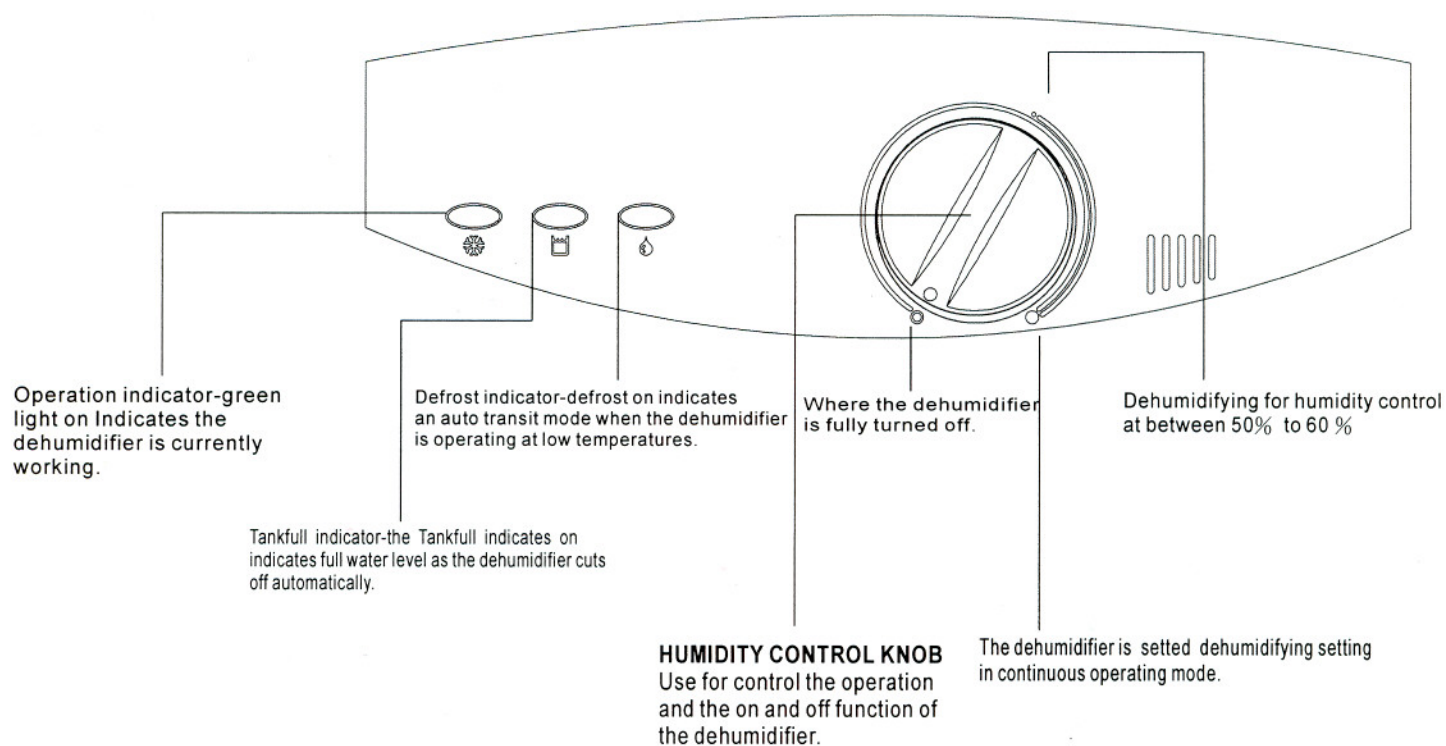

Operation

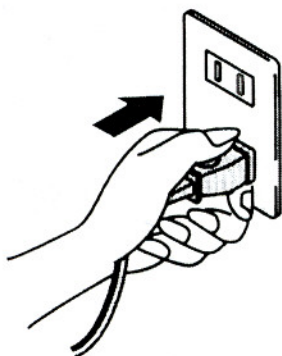


- Insert the power plug securely.




- Rotate the humidity dial to desired setting, generally set to the dehumidifying position, and the dehumidifier will automatically come on if the humidity inside the room exceeds the selected setting.
- Upon reaching the desired humidity once the dehumidifier is set to work, the dehumidifier will automatically stop.
- The dehumidifier will automatically come on once the humidity within the space exceeds over the setting.


Emptying the drip bucket:

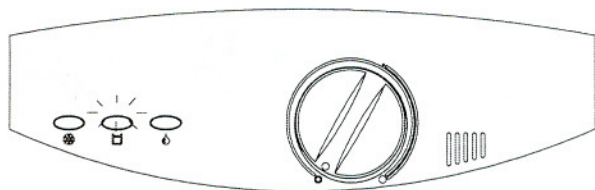


- When the water reaches the full level of the drip bucket, the full-level indicator will come on, and dehumidifier cut off automatically.

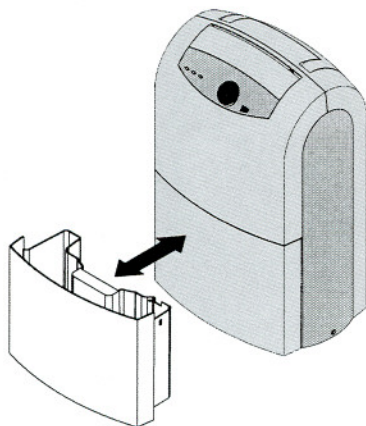

- Retrieve the drip bucket, empty the moisture contents, and replace it; the dehumidifier will return to auto operating mode.




- Maneuver the drip bucket by the handle shown.




- Hold the bucket by the sides with your two hands to empty the moisture contents.

Hooking up the permanent drain:

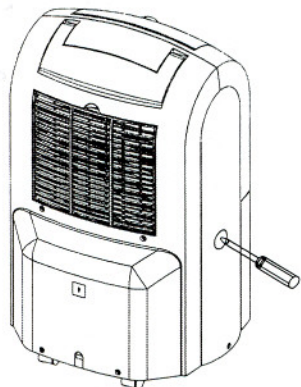


- Please prepare common drainage, PVC gooseneck of approx. 13 mm in diameter, commonly found at home furnishing stores, cut to required length.
- Lightly tap open the permanent drainage hole on the left of the housing.
- Insert the drainage into the permanent drainage on the unit.

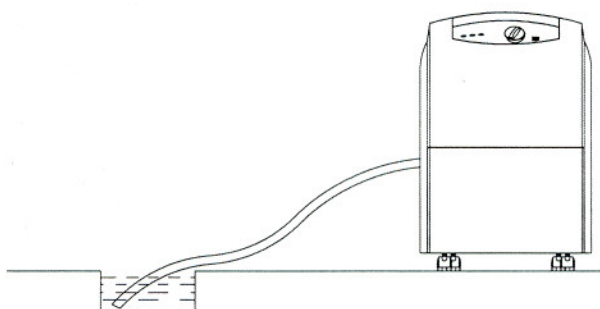


- When using the permanent drain, make sure the drainage gooseneck is laid flat horizontally and fastened to place; avoid over lapping or depressing, and make sure it lays lower than the positions of the permanent drain.


Safety precaution:




Never handle any power cord with your hands wet.




Refrain from using multiple power tap to avoid electrical spark.



Keep the unit and control panel absolutely from of contact to moisture.

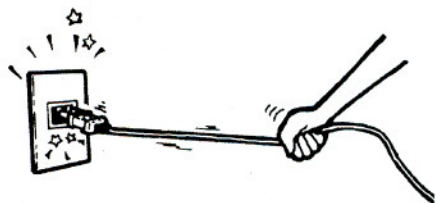

Never pull from the power cord to avoid electrical short.




For optimal safety, remove the power cord and turn off the unit whenever clesup or servicing is required.



Refrain from disassembling or servicing the unit, unless by trained service technician.


Warning:



Never insert any foreign object into the unit to avoid hazard.



Keep off all combustibles, such as gasoline, from the unit.



Keep the electrical plug clean at all times.




Never drape clothing over the dehumidifier for drying purposes.




Never spray insecticide or apply grease paint near the unit to avoid deforming the plastic parts or causing fire hazard.


Operating precaution:

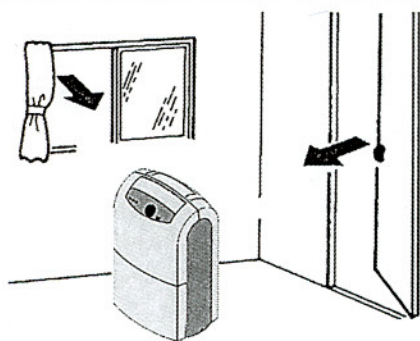

Refrain from leaving the door or windows open so to maximize its dehumidifying function.

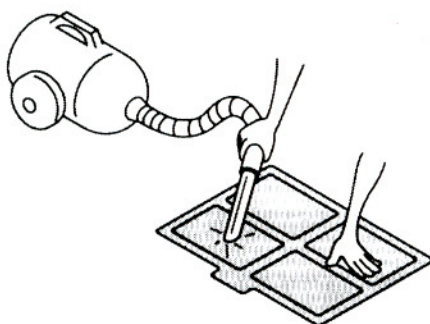

Please clean the filter regularly to ensure maximum air intake and dehumidifying efficiency.

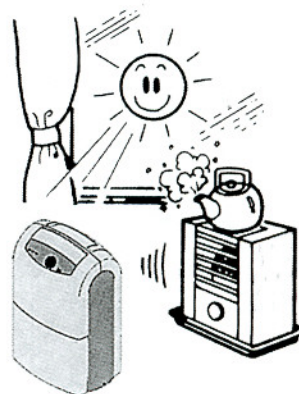


Please keep the unit away from all heat sources to prevent the plastic parts from deformation, which may lead to hazard.

Operating precaution:



Refrain from operating the dehumidifier near the sink.

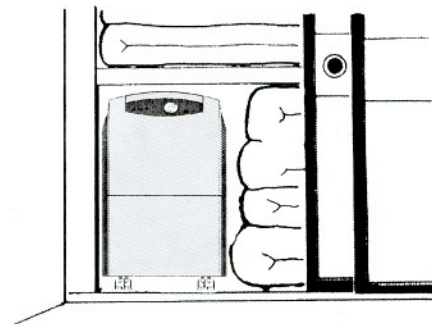

Refrain from operating the dehumidifier in a confined closet.



Allow adequate clearance around all sides of the dehumidifier.

Maintenance tips:


Always make up the current switch has been turned off whenever service or repair is required on the dehumidifier, and make sure the power plug has been removed to maximum operating safety.

1) Caring for the housing :

- A. Use a soft, clean rag to wipe the surface of the dehumidifier.
- B. For dust buildup, mild cleansing agent may be used to gently wipe clean the surface, the wipe agent off with tap water.
- C. Never rinse the unit with water directly to avoid causing poor insulation or current leakage.

2) Cleaning the air filter :

The air filter serves to filter out the dust or odor in the air, and excessive dust buildup on the filter may lessen out the filter on a biweekly basis under normal operating conditions so to maintain the unit in its full dehumidifying efficiency.



Emergency gandling:

In the event the dehumidifier should malfunction or emit strange odor, please remove the current plug immediately, and contact our service department for disposition; do not attempt to disassemble the unit in your own so to avoid electrical hazard.