INTRODUCTION	p.10
ELECTRICAL CLEANERS	p.11
TORNAX PRO	p.16
• RT 2100	p.17
• RT 3200	p.18
CYCLONX™ PRO	p.19
• RC 4380	p.20
• RC 4400	p.21
• RC 4402	p.22
VOYAGER TM	p.23
• RE 4200	p.25
• RE 4400 iQ	p.26
VORTEX™ PRO 4WD	p.27
• RV 5300	p.28
• RV 5380	p.29
• RV 5600	p.30
ALPHA IQ™ PRO	p.31
• RA 6300 iQ	p.33
• RA 6500 iQ	p.34
• RA 6700 iQ	p.35

HYDRAULIC CLEANERS	p.37
• KONTIKI™ 2	p.38
• T3®	p.39
• T5®Duo	p.40
• MX6 TM	p.41
• MX9 TM	p.42
 Cyclonic[™] Leaf Catcher 	p.43
 Spa Wand 	p.44



> 3 TECHNOLOGIES FOR SWIMMING POOL CLEANING

To clean a pool as well as possible, multiple parameters are considered in **the choice of cleaning equipment:** shape and lining of the pool, standard of cleaning, volume to be covered, etc.

High technology Zodiac® cleaners match the different features of a pool, the cleaning time and every budget.

3 types of technologies are currently available:

electric cleaning, hydraulic cleaning and pressure cleaning.

> ZODIAC® ELECTRIC ROBOTIC CLEANERS: A HIGH-PERFORMANCE, STAND-ALONE SYSTEM

Separate from the filtration system and simply connected to the mains power, they are Plug&Play and **stand-alone equipment.**

With no action required and **programmable** (cleaning time, area to be covered, etc.), they reach every corner of the pool, climb the walls, clean the water line and collect impurities in their own filter basket.

There are different models for all types of pools.





> ZODIAC® HYDRAULIC ROBOTIC CLEANERS: A SIMPLE AND AFFORDABLE SOLUTION

Hydraulic robotic cleaners can be easily installed in the pool filtration system. In fact, they work on the energy produced by your pump.

Vacuum cleaners capture debris by suction and accumulate it in the pump pre-filter.

More affordable than electric cleaners, hydraulic cleaners are connected to a pool vacuum point or a skimmer and are **particularly suitable for the smallest pools** (with a flat floor or gentle slope and above-ground pools).

> AUTOMATIC POLARIS® CLEANERS: THE POWER OF A HIGH-PRESSURE CLEAN

These cleaners **use the swimming pool's filtration pump as a power source** for even more efficient and precise high-pressure cleaning.

Instead of being connected to the suction, pressure cleaners are connected to the pool water return, using the vacuum point converted to discharge.

In this way, the pool skimmers remain active and maintain full surface filtration capacity.

Pressure cleaners work with a booster pump and have a canister that collects debris sucked in, preventing the pump pre-filter from becoming blocked.



To optimise the efficiency of these accessories, it is essential to ensure they are compatible with the pool lining, filtration equipment, environment, etc.

> ELECTRIC ROBOT CLEANERS

A stand-alone and efficient solution

The electric robots combine the best of Zodiac® technology.

Thanks to the embedded cyclonic suction, a patented Zodiac[®] technology, **the cleaning performance is maintained throughout the cleaning cycle**. They even capture the finest debris without filter clogging.

Separate from the filtration system, these Plug&Play devices trap debris in their own filter basket, making them stand-alone.



> TORNAX PRO, EFFICIENCY PURE & SIMPLE

The Tornax robotic cleaner guarantees **efficient cleaning** of your pool, completely autonomously, thanks to its smart movement and its rotating brush, which removes debris before collecting it. Tornax is the **lightest** (5.5 kg) of all the Zodiac® robotic cleaners.

It is feather-light, meaning it is quick, easy and **effortless** to operate. Tornax is designed not only to be easy to use but also easy to maintain, as the filter can be accessed from the top so it can be rinsed without touching the debris.



> CYCLONX™ PRO, CONCENTRATED TECHNOLOGY

Robotic cleaners in the CyclonX[™] PRO range provide optimum cleaning of the pool, thanks to several pre-programmed cycles, a **Deep Clean** cycle to clean the pool floor and a one-hour **Quick Clean** programme. Thanks to their large capacity filter (up to 3.7 L) and their wide suction inlets, all debris is collected. The filter can be easily cleaned using the **Push'n'Go™** function, a patented Zodiac[®] innovation that helps raise the filter basket handle with the push of a button.



> VOYAGER™, HIGH POWER AGILITY

With its patented cyclonic suction, VOYAGER™ range adapts to all pools and all coatings. Thanks to **embedded sensors** such as gyroscope or accelerometer, the robotic cleaners offers **excellent coverage of each pool**. Also remotely accessible via the iAqualink™ application. Its helical brushes, its **double filtration canister** (60 and 150 microns) and its large suction inlet of 23cm allow a thorough cleaning of all areas of the pool.



> VORTEX™ PRO 4WD, ULTIMATE POWER IN A 4 X 4 VERSION

Robotic cleaners from the Vortex[™] PRO 4WD range are equipped with Zodiac[®] patented **extra-powerful and long-lasting suction**. Equipped with **4-wheel drive**, these robotic cleaners are truly all-terrain: they adapt to all kinds of surfaces, perfectly grip the walls and get over obstacles more easily. Most of Vortex[™] PRO 4WD robotic cleaners also come with **Lift System** technology, so they are lighter when being removed from water (20% less effort).



> ALPHA iQ[™], ULTRA-EFFICIENCY COMBINED WITH INTELLIGENCE

With its Sensor Nav SystemTM, the ALPHA iQTM range identifies the configuration of your pool **to optimise movements** and cleaning time. The patented cyclone suction garantees **extremely powerful and long-lasting suction**. Thanks to its patented **Lift System**, ALPHA iQTM is lighter when removing it from the water. Monitor cleaning progress at any time through the **intuitive interface** of the iAquaLinkTM application. ALPHA iQTM is **upgradeable** thanks to possible optimisations and automatic remote updates.



CYCLONIC SUCTION

Patented technology for powerful cleaning

> HOW DOES IT WORK?

Thanks to its unique design, Vortex cleaners feature **Cyclonic Suction**: the flow is **keeping debris in suspension inside the filter** and allows a longer lasting suction while **limiting the clogging.**



Robotic cleaners equipped with cyclonic suction: RV 5300, RV 5380, RV 5600, RA 6300 iQ, RA 6500 iQ and RA 6700 iQ



LIFT SYSTEM

Patented innovation for easier removal from the water

> 20% LESS EFFORT

The robotic cleaner positions itself on the chosen wall and cleans right up to the water line. Then a powerful waterjet propels it from the water: **which means you can remove the robot from the water with just 20% of the effort**.



Robotic cleaners equipped with Lift System: RV 5380, RV 5600, RA 6300 iQ, RA 6500 iQ and RA 6700 iQ.




SENSOR NAV SYSTEM™

Smart navigation system for efficient and customized cleaning

> PERSONALISED CLEANING OF EACH POOL

Sensor Nav System™ gathers different embedded features which enable the robotic cleaners to learn all about each pool and to adapt its cleaning in the smartest way.







Robotic cleaners equipped with Smart Nav system™: RA 6300 iQ, RA 6500 iQ and RA 6700 iQ





SWIVEL

Avoid cable tangling

> HOW DOES IT WORK?

Automatic swivel system prevents cable tangling during cleaner operation in the pool. **The cleaner efficiency is optimized and the cable storage is easier.**



Robotic cleaners equipped with Swivel: RV 5380, RV 5600, RA 6300 iQ, RA 6500 iQ and RA 6700 iQ



4-WHEEL DRIVE (4WD)

Effective cleaning of all surfaces

> GETTING OVER OBSTACLES MORE EASILY

Equipped with **4-wheel drive**, robots from the **Vortex[™] PRO 4WD** and **ALPHA iQ[™]** ranges adapt to all situations.



> OPTIMAL COVERAGE AND PERFECT GRIP

Thanks to their excellent grip, robots from the Vortex[™] **PRO 4WD** and **ALPHA iQ**[™] ranges get into the tiniest corners of the pool and clean **all kinds of surface**. The robots ensure **the pool is cleaned perfectly**.

Robotic cleaners equipped with 4 Wheel-drive: RV 5300, RV 5380, RV 5600, RA 6300 iQ, RA 6500 iQ and RA 6700iQ



DUAL STAGE FILTRATION


Finer filtration and long lasting suction

> 2 FILTERS FOR LONG LASTING SUCTION AND FINER DEBRIS PICK UP

These 2 combined filters offer a larger mesh surface that a standard filter which allows to postpone the clogging effects. This unique design also allows the ability to use the larger mesh filter alone, which can be very useful at the beginning of the season



2 imbricated filters : the dirty water flows through a coarse layer first (150 μ) and a finer one after (60 μ). The coarse filter will retain the larger debris and the finer one will then allow a finer filtration.



Robotic cleaners equipped with Dual-stage filtration: RE 4400 iQ



> **ELECTRIC CLEANERS**

A stand-alone and efficient solution

COI	MPARATIVE TABLE	RT 2100	RT 3200	RC 4380	RC 4400 RC 4402	RE 4200	RE 4400 iQ
	OF RANGES TECHNICAL SPECIFICATIONS						
sloc	Surfaces	Liner, polyester hull, reinforced PVC, painted concrete, tiles (dedicated brushes)	Liner, polyester hull, reinforced PVC, painted concrete, tiles (dedicated brushes)	Liner, reinforced PVC, painted concrete Polyester hull & tiles with dedicated brushes	Liner, reinforced PVC, painted concrete Polyester hull & tiles with dedicated brushes	Liner, polyester hull, reinforced PVC, painted concrete, tiles	Liner, polyester hull, reinforced PVC, painted concrete, tiles
Types of pools	Shapes	Rectangular, oval, free shape	Rectangular, oval, free shape	Rectangular, oval, free shape	Rectangular, oval, free shape	Rectangular, oval, free shape	Rectangular, oval, free shape
Ā	Bottom	Flat, composite shape	Flat, composite shape	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape
	Size	8 x 4 m (14m cable)	9 x 4 m (16m cable)	10 x 5 m (15m cable)	12 x 6 m (18m cable)	10 x 5 m (15m cable)	12 x 6 m (18m cable)
	Traction	Tracks	Tracks	Tracks	Tracks	Tracks	Tracks
	Cleaning areas	Floor	Floor / walls	Floor / walls / water line	Floor / walls / water line	Floor / walls / water line	Floor / walls / water line
	Cyclonic Suction	-	-	-	-	√	√
Ф	Filtering level	100μ	100μ	100μ	100μ	100μ	Dual 150μ + 60μ Or coarse 150μ only
Performance	Filter capacity	3L	3L	3,7L	3,7L	4L	4L
Perfor	Swivel	_	_	-	_	_	_
Ш	Sensor Nav System™	-	-	-	-	-	-
	Remote control	-	-	-	-	-	-
	Type of brush	Standard	Standard	Standard	Standard	Helix shaped	Helix shaped
	Number of cycles	1	1	2	6	2	2
Cycles	Cleaning cycles	Floor only	Floor / Walls	Floor / walls / water line Floor only	Floor / walls / water line Floor only	Floor / walls / water line Floor only	Floor / walls / water line Floor only
	Manual cleaning time adjustment	-	-	-	√	-	-
	iAqualink™ app control	-	-	-	-	-	√
	Lift System	-	-	-	-	-	-
	7-day timer	-	-	-	-	-	-
nse	Full filter indicator	-	-	-	√	-	-
Ease of u	Transparent window	-	√	√	√	√	√
Ш	Backlit filter	-	-	-	-	-	√
	Type of filter	Rigid Filter canister with top access	Rigid Filter canister with top access	Rigid Filter canister with top access	Rigid Filter canister with top access	Rigid Filter canister with top access	Rigid Filter canister with top access
	Trolley	-	-	-	√	-	-
Advanced app features	Water temperature display	-	-	-	-	-	-
Advan	Spot cleaning mode	-	-	-	-	-	-
	Warranty	2 years	2 years	2 years	2 years	2 years	3 years*

^{* 2} years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$

C	OMPARATIVE TABLE	RV 5300	RV 5380	RV 5600	RA 6300 iQ	RA 6500 iQ	RA 6700 iQ
TECHN	OF RANGES NICAL SPECIFICATIONS						
sloo	Surfaces	Liner, polyester hull, reinforced PVC, painted concrete, tiles	Liner, polyester hull, reinforced PVC, painted concrete, tiles				
Types of pools	Shapes	Rectangular, oval, free shape	Rectangular, oval, free				
T _Y	Bottom	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape	Flat, composite shape diamond shape
	Size	12 x 6 m (18m cable)	12 x 6 m (18m cable)	20 x 10 m (25m cable)	12 x 6 m (18m cable)	12 x 6 m (18m cable)	15 x 7 m (21m cable)
	Traction	4 WD	4 WD				
	Cleaning areas	Floor / walls / water line	Floor / walls / water line	Floor / walls / water line	Floor / walls / water line	Floor / walls / water line	Floor / walls / water line
	Cyclonic Suction	✓	√	✓	√	√	V
Performance	Filtering level	100μ	100μ	100μ	60µ	60µ	60µ
form	Filter capacity	5L	5L	5L	5L	5L	5L
Per	Swivel	-	√	√	√	√	√
	Sensor Nav System™	-	-	-	√	√	√
	Remote control	-	-	V	-	in app	in app
	Type of brush	Contact +	Contact +				
	Number of cycles	2	2	Multiple	2	Multiple	Multiple
Cycles	Cleaning cycles	Floor / Walls / Waterline Floor only	Floor / Walls / Waterline Floor only	Floor / Walls / Waterline Floor only Waterline only	Smart : Floor / Walls / Waterline Quick : Floor only	Smart : Floor / Walls Waterline Quick : Floor only Ultra : Floor / Walls / Waterline	Smart : Floor / Walls / Waterline Quick : Floor only Ultra : Floor / Walls Waterline Waterline only
	Manual cleaning time adjustment	-	-	V	-	√	√
	iAqualink™ app control	-	-	-	V	V	V
	Lift System	-	√	V	v	v	v
	7-day timer	-	-	V	-	in app	in app
Φ	Full filter indicator	v	√	√	√	v	V
Ease of use	Transparent window	-	-	-	√	√	v
Eas	Backlit filter	-	-	-	√	√	V
	Type of filter	Rigid Filter canister with top access	Rigid Filter canister with top access				
	Trolley	V	√	J	V	√	V
ed app	Water temperature display	-	-	-	-	-	in app
Advanced app features	Spot cleaning mode	-	-	-	-	-	in app
	Warranty	3 years	3 years	3 years	4 years**	4 years**	4 years**

 $^{^{*}}$ 2 years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$

 $^{^{**}}$ 3 years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$



> TORNAX

Efficiency, pure and simple





Cleans the pool floor (RT 21XX)



Cleans floor and walls (RT 32XX)



Light for effortless handling



Easy-to-clean filter

COMPARATIVE TABLE OF RANGES TECHNICAL SPECIFICATIONS		RT 2100	RT 3200
sloc	Surfaces	Liner, polyester hull, reinforced PVC, painted concrete	Liner, polyester hull, reinforced PVC, painted concrete
of po	Shapes	Rectangular, oval, free shape	Rectangular, oval, free shape
Types of pools	Size	8 x 4 m (14m cable)	9 x 4 m (16m cable)
	Traction	Tracks 1 motor	Tracks 1 motor
	Cleaning areas	Floor	Floor / walls
ge	Cyclonic suction	-	-
Performance	Filtering level	100μ	100μ
erfo	Filter capacity	3L	3L
ш	Swivel	-	-
	Sensor Nav System™	-	-
	Remote control	-	-
Ø	Number of cycles	1	1
Cycles	Cleaning cycles	Floor only	Floor / Walls
O	Manual cleaning time adjustment	-	-
	iAqualink app control	-	-
	Lift System	-	-
O)	7-day timer	-	-
of use	Full filter indicator	-	-
Ease of use	Transparent window	-	V
Ш	Backlit filter	-	-
	Type of filter	Rigid Filter canister with top access	Rigid Filter canister with top access
	Trolley	-	-
	Warranty	2 years	2 years

Pool Cleaners > Electrics > RT 2100 TORNAX PRO

EFFICIENCY, PURE AND SIMPLE

- + Efficient floor cleaning
- + Lightweight for effortless handling
- + Easy clean filter



REFERENCE PRICE

Product reference: WR000092

ACCESSORIES INCLUDED IN THE PACK







Control box

Fine Filter canister 100µ

Control box base

FOR WHICH TYPE OF POOLS?	
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 8 x 4 m
Pool shapes	Rectangular, oval, free shape
All Floors	Flat, gentle slope, composite slope
Pool surfaces	Liner, polyester hull, reinforced PVC, painted concrete, Tiles *

DESCRIPTION	
Cleaning areas	Floor
Number / Length of cleaning cycles	1 cycle - Floor : 2h30
Power supply	Autonomous, connected to 230V mains supply before the transformer
Steering	Pre-programmed
Drive system	Tracks - 1 motor
Transmission	Gear transmission
Brushes	Yes
Safety	Deck system, out of water safety, diagnostic, electronic motor protector
Filtration system / access	Rigid Filter canister with access over the cleaner
Units / pallet	36

TECHNICAL SPECIFICATIONS				
Number of motors	2			
Control box supply	100-240 VAC ; 50 / 60 Hz			
Power supply	30 VDC			
Operating power	100 W			
Cable length	14 m			
Cleaner size (L x W x h)	37 x 29 x 30 cm			
Packaging size (L x W x h)	56 x 37 x 38 cm			
Cleaner weight	5,5 kg			
Packaging weight	10 kg			
Filtering surface and level	480 cm ² / 100μ			
Filtering capacity	3 L			
Inlet suction size	17 cm			



Spare parts p.208

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Trolley	Special tile brush (unit)
Reference	R0763100	R0762900	R0763000	R0767600	R0774900

^{*}For optimal cleaner behavior in some tile pools, it might be necessary to use the specific tile brush accessory.





Pool Cleaners > Electrics > RT 3200 TORNAX PRO

EFFICIENCY, PURE AND SIMPLE

- + Efficient floor and walls cleaning
- + Lightweight for effortless handling
- + Easy clean filter



REFERENCE PRICE

Product reference: WR000093

ACCESSORIES INCLUDED IN THE PACK







Control box

Fine Filter canister 100µ

Control box base

FOR WHICH TYPE OF POOLS?				
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 9 x 4 m			
Pool shapes	Rectangular, oval, free shape			
All Floors	Flat, gentle slope, composite slope			
Pool surfaces	Liner, polyester hull, reinforced PVC, painted concrete, Tiles *			

DESCRIPTION	
Cleaning areas	Floor / walls
Number / Length of cleaning cycles	1 cycle - Floor / walls : 3h
Power supply	Autonomous, connected to 230V mains supply before the transformer
Steering	Pre-programmed
Drive system	Tracks - 1 motor
Transmission	Gear transmission
Brushes	Yes
Safety	Deck system, out of water safety, diagnostic, electronic motor protector
Filtration system / access	Rigid Filter canister with access over the cleaner
Units / pallet	36

TECHNICAL SPECIFICATIONS			
Number of motors	2		
Control box supply	100-240 VAC ; 50 / 60 Hz		
Power supply	30 VDC		
Operating power	100 W		
Cable length	16,5m		
Cleaner size (L x W x h)	37 x 29 x 30 cm		
Packaging size (L x W x h)	56 x 37 x 38 cm		
Cleaner weight	5,5 kg		
Packaging weight	11 kg		
Filtering surface and level	480 cm ² / 100μ		
Filtering capacity	3 L		
Inlet suction size	17 cm		



Spare parts p.208

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Trolley	Special tile brush (unit)
Reference	R0763100	R0762900	R0763000	R0767600	R0774900

 $^{^{\}star}$ For optimal cleaner behavior in some tile pools, it might be necessary to use the specific tile brush accessory.



$> \mathbf{CYCLONX^{TM}}$

The essentials of Zodiac® technology



COMPARATIVE TABLE OF RANGES TECHNICAL SPECIFICATIONS		RC 4380	RC 4400	RC 4402
s of pools	Surfaces	Liner, reinforced PVC, painted concrete Polyester hull & tiles with dedicated brushes	Liner, reinforced PVC, painted concrete Polyester hull & tiles with dedicated brushes	Polyester hull and tile (slippery pools)
Types of	Shapes	Rectangular, oval, free shape	Rectangular, oval, free shape	Rectangular, oval, free shape
_	Size	10 x 5 m (15m cable)	10 x 5 m (15m cable)	12 x 6 m (18m cable)
	Traction	Tracks, 1 motor	Tracks, 1 motor	Tracks, 1 motor
	Cleaning areas	Floor / walls / waterline	Floor / walls / waterline	Floor / walls / waterline
	Cyclonic Suction	-		-
ance	Filtering level	100μ	100μ	100μ
Performance	Filter capacity	3,7L	3,7L	3,7L
Perfo	Swivel	-	-	-
	Sensor Nav System™	-	-	-
	Remote control	-	-	-
	Contact + brushes	-	-	-
	Number of cycles	2	6	6
Cycles	Cleaning cycles	Floor / walls / water line Floor only	Floor / walls / water line Floor only	Floor / walls / water line Floor only
	Manual cleaning time adjustment	-	-	✓
	iAqualink app control	-	-	-
	Lift System	-	-	-
	7-day timer	-	-	-
Ease of use	Full filter indicator	-	✓	✓
	Transparent window	✓	√	✓
	Backlit filter	-	-	-
	Type of filter	Rigid Filter canister with top access	Rigid Filter canister with top access	Rigid Filter canister with top access
	Trolley	-	-	✓
	Warranty	2 years	2 years	2 years



RC 4380 CYCLONX™ PRO

Pool Cleaners > Electrics > RC 4380 CYCLONX™ PRO

CONCENTRATED TECHNOLOGY

- + Optimal cleaning for the floor/walls/water line
- + Large suction capacity
- + Filter access at the push of a button









REFERENCE PRICE

Product reference: WR000240

ACCESSORIES INCLUDED IN THE PACK







Control box

Fine Filter canister 100µ

Control box base

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 10 x 5 m	
Pool shapes	Rectangular, oval, free shape	
All Floors	Flat, gentle slope, composite slope, diamond shape	
Pool surfaces	Liner, reinforced PVC, painted concrete, polyester hull, Tiles: dedicated brushes kit	

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	2 cycles : - Floor «Deep Clean» : 1h30 - Floor / walls / waterline : 1h30	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	Tracks - 1 motor	
Transmission	Gear transmission	
Brushes	Yes	
Lift System	no	
Transparent window	Yes	
Full filter indicator	No	
Remote control	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister with access over the cleaner	
Units / pallet	20	

TECHNICAL SPECIFICATIONS		
Number of motors	2	
Control box supply	200-240 VAC ; 50 / 60 Hz	
Power supply	30 VDC	
Operating power	150 W	
Cable length / Hose length	15 m	
Cleaner size (L x W x h)	41 x 42 x 28 cm	
Packaging size (L x W x h)	56 x 56 x 38 cm	
Cleaner weight	9 kg	
Packaging weight	17,1 kg	
Filtering surface and level	850 cm ² / 100μ	
Filtering capacity	3,7 L	
Inlet suction size / Cleaned width	22 cm	



Spare parts p.210

OPTIONAL ACCESSORIES (NOT INCLUDED)



















canister 60µ Reference R0632602

Large debris filter canister 200µ R0632601

Fine filter canister 100μ R0632600

Protective cover

R0568100

Trolley

R0639500

Kit for polyester hull pools (2 brushes) R0697600



Kit for slippery surfaces (2 brushes) R0718600





RC 4400 CYCLONX™ PRO

Pool Cleaners > Electrics > RC 4400 CYCLONX™ PRO

CONCENTRATED TECHNOLOGY

- + Optimal cleaning for the floor/walls/water line
- + Large suction capacity
- + Filter access at the push of a button









REFERENCE PRICE

Product reference: WR000021

ACCESSORIES INCLUDED IN THE PACK







Trolley

Control box

Fine Filter canister 100µ

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m	
Pool shapes	Rectangular, oval, free shape	
All Floors	Flat, gentle slope, composite slope, diamond shape	
Pool surfaces	Liner, reinforced PVC, painted concrete, polyester hull, Tiles: dedicated brushes kit	

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	6 cycles : - Floor «Deep Clean» : 1h, 1h30, 2h - Floor / walls / waterline : 1h, 1h30, 2h	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	Tracks - 1 motor	
Transmission	Gear transmission	
Brushes	Yes	
Lift System	no	
Transparent window	Yes	
Full filter indicator	Yes	
Remote control	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister with access over the cleaner	
Units / pallet	16	

TECHNICAL SPECIFICATIONS		
Number of motors	2	
Control box supply	200-240 VAC ; 50 / 60 Hz	
Power supply	30 VDC	
Operating power	150 W	
Cable length	18m	
Cleaner size (L x W x h)	41 x 42 x 28 cm	
Packaging size (L x W x h)	56 x 56 x 46 cm	
Cleaner weight	9,5 kg	
Packaging weight	19,1 kg	
Filtering surface and level	850 cm ² / 100μ	
Filtering capacity	3,7 L	
Inlet suction size	22 cm	



Spare parts p.212

OPTIONAL ACCESSORIES (NOT INCLUDED)

R0632602







R0632601



*	
Fine filter canister 100µ	
R0632600	



Protective cover



Kit for polyester hull pools (2 brushes) R0697600



Kit for slippery surfaces (2 brushes) R0718600



Reference

RC 4402 CYCLONX™ PRO

Pool Cleaners > Electrics > RC 4402 CYCLONX™ PRO

CONCENTRATED TECHNOLOGY

Adapted for pools with slippery surfaces (polyester hull, tile)

- + Optimal cleaning for the floor/walls/water line
- + Large suction capacity
- + Filter access at the push of a button







REFERENCE PRICE

Product reference: WR000239

ACCESSORIES INCLUDED IN THE PACK







Trolley

Control box

Fine Filter canister 100μ

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m	
Pool shapes	Rectangular, oval, free shape	
All Floors	Flat, gentle slope, composite slope, diamond shape	
Pool surfaces	Slippery surfaces (polyester hull, tile)	

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	6 cycles : - Floor «Deep Clean» : 1h, 1h30, 2h - Floor / walls / waterline : 1h, 1h30, 2h	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	Tracks - 1 motor	
Transmission	Gear transmission	
Brushes	Yes	
Lift System	no	
Transparent window	Yes	
Full filter indicator	Yes	
Remote control	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister with access over the cleaner	
Units / pallet	16	

TECHNICAL SPECIFICATIONS		
Number of motors	2	
Control box supply	200-240 VAC ; 50 / 60 Hz	
Power supply	30 VDC	
Operating power	150 W	
Cable length / Hose length	18m	
Cleaner size (L x W x h)	41 x 42 x 28 cm	
Packaging size (L x W x h)	56 x 56 x 46 cm	
Cleaner weight	9,5 kg	
Packaging weight	19,1 kg	
Filtering surface and level	850 cm ² / 100μ	
Filtering capacity	3,7 L	
Inlet suction size / Cleaned width	22 cm	



Spare parts p.212







> VOYAGERTM

FULL ON AGILITY

RE 4400 iQ



> CYCLONIC PERFORMANCE

Its patented cyclonic suction is powerful and long-lasting. Its helix shaped brushes and dual stage progressive filtration collect all debris more efficiently, even the smallest ones.

With VOYAGER™, your pool will be perfectly clean all year round.



> INTEGRATED AGILITY


With its embedded smart sensors and its unique design, VOYAGER™ offers excellent pool coverage and limitless agility. Thus, it is ideal for all pool shapes and surfaces.



> EASE OF USE

Thanks to the iAquaLinkTM application, your robotic cleaner's features can be accessed remotely using your smartphone. VOYAGERTM is also upgradeable thanks to its automatic updates*.lts backlit top access filter, and its transparent window offers real daily ease of use.


* Cleaner must be connected to the iAqualink app to allow software updates.

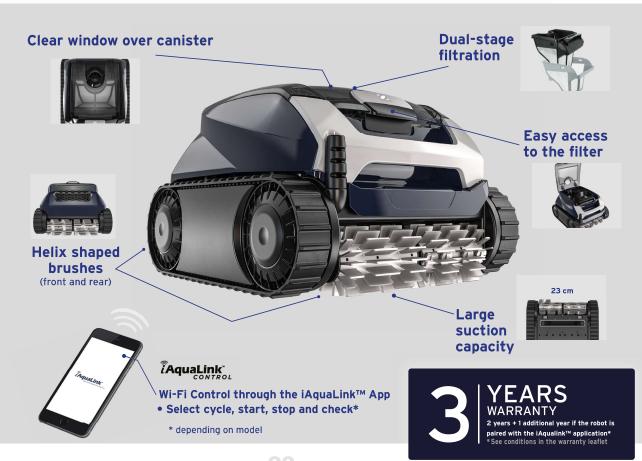




> VOYAGERTM FULL ON AGILITY









Dual-stage filtration



Helix brushes



Intuitive user interface

COMPARATIVE TABLE OF RANGES		RE 4200	RE 4400 iQ	
	TECHNICAL SPECIFICATIONS			
slood	Surfaces	Liner, polyester hull, reinforced PVC, painted concrete, tiles	Liner, polyester hull, reinforced PVC, painted concrete, tiles	
of D	Shapes	Rectangular, oval, free shape	Rectangular, oval, free shape	
Types of	Bottom	Flat, composite shape, diamond shape	Flat, composite shape, diamond shape	
	Size	10 x 5 m (15m cable)	12 x 6 m (18m cable)	
	Traction	Tracks 2 motors	Tracks 2 motors	
	Cleaning areas	Floor / walls / water line	Floor / walls / water line	
40	Cyclonic suction	V	✓	
Performance	Filtering level	100μ	Dual 150µ + 60µ Or coarse 150µ only	
erfor	Filter capacity	4L	4L	
ď	Swivel	-	-	
	Sensor Nav System™	-	-	
	Remote control	-	-	
	Type of brush	Helix shaped - Front	Helix shaped - Front & rear	
	Number of cycles	2	2	
Cycles	Cleaning cycles	Floor / Walls / Waterline Floor only	Floor / Walls / Waterline Floor only	
	Manual cleaning time adjustment	-	-	
	iAqualink app control	-	√	
	Lift System	-	-	
Φ	7-day timer	-	-	
sn Jo	Full filter indicator	-	-	
Ease of use	Transparent window	√	✓	
Щ	Backlit filter	-	✓	
	Type of filter	Rigid Filter canister with top access	Rigid Filter canister with top access	
	Trolley	-	-	
	Water temperature display	-	-	
	Spot cleaning mode	-	-	
	Warranty	2 years	3 years*	

RE 4200 VOYAGER™

Pool Cleaners > Electrics > RE 4200 VOYAGER™

FULL ON AGILITY

- + Optimal cleaning performance : Patented cyclonic suction / Helix shaped brushes / Large suction capacity
- + Integrated agility: Designed to work in all pool shapes or surfaces / Tracks / accelerometer & gyroscope sensors
- + Ease of use: Top access filter / transparent window







REFERENCE PRICE

Product reference: WR000331

ACCESSORIES INCLUDED IN THE PACK







Control box

Fine Filter canister 100µ

Control box base

FOR WHICH TYPE OF POOLS?		
Types of pools Private in-ground pools and above-ground pools with rigid walls, maximum 10 x s		
Pool shapes	Rectangular, oval, free shape	
All Floors Flat, gentle slope, composite slope, diamond shape		
Pool surfaces Tiles, liner, polyester hull, reinforced PVC, painted concrete		

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	2 cycles : - Floor only : 1h30 - Floor / walls / waterline : 2h30	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	Tracks - 2 motors	
Brushes	Yes - front brushes	
Lift System	No	
Transparent window	Yes	
Full filter indicator	No	
Remote control	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister / Top access	
Units / pallet	20	

TECHNICAL SPECIFICATIONS		
Number of motors	3	
Control box supply	200-240 VAC ; 50 / 60 Hz	
Power supply	30 VDC	
Operating power	150 W	
Cable length / Hose length	15m	
Cleaner size (L x W x h)	43 x 40 x 30 cm	
Packaging size (L x W x h)	56 x 56 x 37 cm	
Cleaner weight	8 kg	
Packaging weight	14kg	
Filtering surface and level	526cm² / 100μ	
Filtering capacity	4L	
Inlet suction size	23 cm	



Spare parts p.214

			7		
	Main canister 200µ for single filter	Main canister 150µ for dual stage filter	Over canister 60µ for dual stage filter	Protective cover	Trolley
Reference	R0897700	R0897600	R0898100	R0568100	R0639500



Pool Cleaners > Electrics > RE 4400 iQ VOYAGER™

FULL ON AGILITY

- + Optimal cleaning performance : Patented cyclonic suction / Helix shaped brushes / progressive dual stage filtration 150/60µ
- + Integrated agility: Designed to work in all pool shapes or surfaces / Tracks / accelerometer & gyroscope sensors
- + Control via iAqualink™ app : basic features
- + Ease of use: Top access filter / transparent window

NEW FOR **2021**









REFERENCE PRICE

Product reference: WR000327

ACCESSORIES INCLUDED IN THE PACK









Control box

Dual Filter canister 60μ / 150μ

Control box base

Free app

FOR WHICH TYPE OF POOLS?		
Types of pools Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m		
Pool shapes Rectangular, oval, free shape		
All Floors Flat, gentle slope, composite slope, diamond shape		
Pool surfaces Tiles, liner, polyester hull, reinforced PVC, painted concrete		

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	2 cycles : - Floor only : 1h30 - Floor / walls / waterline : 2h30	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	Tracks - 2 motors	
Brushes	Yes - front and rear brushes	
Lift System	No	
Transparent window	Yes	
Full filter indicator	No	
Remote control	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister / Top access	
Units / pallet	20	

TECHNICAL SPECIFICATIONS		
Number of motors	3	
Control box supply	200-240 VAC ; 50 / 60 Hz	
Power supply	30 VDC	
Operating power	150 W	
Cable length / Hose length	18m	
Cleaner size (L x W x h)	43 x 40 x 30 cm	
Packaging size (L x W x h)	56 x 56 x 37 cm	
Cleaner weight	8 kg	
Packaging weight	14kg	
Filtering surface and level	1066cm² 150/60μ	
Filtering capacity	4L	
Inlet suction size	23 cm	



Spare parts p.216

	Main canister 100µ for single filter	Main canister 200µ for single filter	Protective cover	Trolley
Reference	R0897500	R0897700	R0568100	R0639500

^{* 2} years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$



> **VORTEXTM 4WD RANGE**

Ultimate power



	COMPARATIVE	RV 5300	RV 5380	RV 5600
TABLE OF RANGES TECHNICAL SPECIFICATIONS				
slood	Surfaces	Liner, polyester hull, reinforced PVC, painted concrete, tiles	Liner, polyester hull, reinforced PVC, painted concrete, tiles	Liner, polyester hull, reinforced PVC, painted concrete, tiles
Types of	Shapes	Rectangular, oval, free shape	Rectangular, oval, free shape	Rectangular, oval, free shape
Type	Size	12 x 6 m (18m cable)	12 x 6 m (18m cable)	20 x 10 m (25m cable)
	Traction	4 WD / 2 motors	4 WD / 2 motors	4 WD / 2 motors
	Cleaning areas	Floor / walls / waterline	Floor / walls / waterline	Floor / walls / waterline
	Cyclonic Suction	✓	√	√
ınce	Filtering level	100μ	100μ	100μ
Performance	Filter capacity	5L	5L	5L
erfc	Swivel	-	V	√
	Sensor Nav System™	-	-	-
	Remote control	-	-	✓
	Contact + brushes	V	✓	✓
	Number of cycles	2	2	Multiple
Cycles	Cleaning cycles	Floor / Walls / Waterline Floor only	Floor / Walls / Waterline Floor only	Floor / Walls / Waterline Floor only Waterline only
	Manual cleaning time adjustment	-	-	√
	iAqualink™ app control	-	-	-
	Lift System	-	✓	✓
Se	7-day timer	-	-	✓
of L	Full filter indicator	✓	✓	✓
Ease of use	Transparent window	-	-	-
Ш	Type of filter	Rigid Filter canister with top access	Rigid Filter canister with top access	Rigid Filter canister with top access
	Trolley	V	V	V
	Warranty	3 years	3 years	3 years

RV 5300 VORTEXTM PRO 4WD

Pool Cleaners > Electrics > RV 5300 VORTEX™ PRO 4WD

ULTIMATE POWER IN 4X4

- + Ultra-powerful & long lasting suction
- + All-terrain cleaner
- + Extra large suction capacity





REFERENCE PRICE

Product reference: WR000161

ACCESSORIES INCLUDED IN THE PACK









Trolley

Control box

Fine Filter canister 100µ

Contact + Brushes

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m	
Pool shapes	Rectangular, oval, free shape	
All Floors	Flat, gentle slope, composite slope, diamond shape	
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete	

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	2 cycles : - Floor only : 1h30 - Floor / walls / waterline : 2h30	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	4 wheel drive - 2 motors	
Transmission	Gear transmission	
Brushes	Yes (Contact + Brushes)	
Lift System	No	
Full filter indicator	Yes	
Remote control	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister with access over the cleaner	
Units / pallet	16	

TECHNICAL SPECIFICATIONS			
Number of motors	3		
Control box supply	200-240 VAC ; 50 / 60 Hz		
Power supply	30 VDC		
Operating power	150 W		
Cable length	18m		
Cleaner size (L x W x h)	43 x 48 x 27 cm		
Packaging size (L x W x h)	56 x 56 x 46 cm		
Cleaner weight	9,5 kg		
Packaging weight	21 kg		
Filtering surface and level	1180 cm ² / 100μ		
Filtering capacity	5 L		
Inlet suction size	24,5 cm		



Spare parts p.220

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Protective cover
Reference	R0638600	R0636600	R0643700	R0568100





RV 5380 VORTEX™ PRO 4WD

Pool Cleaners > Electrics > RV 5380 VORTEX™ PRO 4WD

ULTIMATE POWER IN 4X4

- + Ultra-powerful & long lasting suction
- + All-terrain cleaner
- + Effortless removal from the water
- + Extra large suction capacity











WARRANTY

REFERENCE PRICE

Product reference: WR000225

ACCESSORIES INCLUDED IN THE PACK











Trolley

Control box

Fine Filter canister 100μ

Contact + Brushes

Swivel

FOR WHICH TYPE OF POOLS?			
Types of pools Private in-ground pools and above-ground pools with rigid walls, maximum 12			
Pool shapes Rectangular, oval, free shape			
All Floors	Flat, gentle slope, composite slope, diamond shape		
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete		

DESCRIPTION	
Cleaning areas	Floor / walls / waterline
Number / Length of cleaning cycles	2 cycles : - Floor only : 1h30 - Floor / walls / waterline : 2h30
Power supply	Autonomous, connected to 230V mains supply before the transformer
Steering	Pre-programmed
Drive system	4 wheel drive - 2 motors
Transmission	Gear transmission
Brushes	Yes (Contact + Brushes)
Lift System	Yes
Full filter indicator	Yes
Remote control	No
Safety	Deck system, out of water safety, diagnostic, electronic motor protector
Filtration system / access	Rigid Filter canister with access over the cleaner
Units / pallet	16

TECHNICAL SPECIFICATIONS			
Number of motors	3		
Control box supply	200-240 VAC ; 50 / 60 Hz		
Power supply	30 VDC		
Operating power	150 W		
Cable length / Hose length	18m with Swivel		
Cleaner size (L x W x h)	43 x 48 x 27 cm		
Packaging size (L x W x h)	56 x 56 x 46 cm		
Cleaner weight	9,5 kg		
Packaging weight	21 kg		
Filtering surface and level	1180 cm ² / 100µ		
Filtering capacity	5 L		
Inlet suction size / Cleaned width	24,5 cm		



Spare parts p.220

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Protective cover
Reference	R0638600	R0636600	R0643700	R0568100





Pool Cleaners > Electrics > RV 5600 VORTEX™ PRO 4WD

ULTIMATE POWER IN 4X4

- + Ultra-powerful & long lasting suction
- + All-terrain cleaner
- + Effortless removal from the water
- + Extra large suction capacity









REFERENCE PRICE

Product reference: WR000064

ACCESSORIES INCLUDED IN THE PACK













Trolley

Control box

Fine Filter canister 100µ

Contact + Brushes

Kinetic remote control

Swivel

EOD I	ALLICA	1 TVDE	OF	DOOL	60

Types of pools Private in-ground pools and above-ground pools with rigid walls, maximum 20 x 1			
Pool shapes Rectangular, oval, free shape			
All Floors Flat, gentle slope, composite slope, diamond shape			
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete		

DESCRIPTION			
Cleaning areas	Floor / walls / waterline		
Number / Length of cleaning cycles	Multiple from 0h30 to 3h30 - Floor only - Floor / walls / waterline - Waterline only		
Integrated programming clock	7-days		
Power supply	Autonomous, connected to 230V mains supply before the transformer		
Steering	Pre-programmed		
Drive system	4 wheel drive - 2 motors		
Transmission	Gear transmission		
Brushes	Yes (Contact + Brushes)		
Lift System	Yes		
Full filter indicator	Yes		
Remote control	Yes		
Safety	Deck system, out of water safety, diagnostic, electronic motor protector		
Filtration system / access	Rigid Filter canister with access over the cleaner		
Units / pallet	16		

TECHNICAL SPECIFICATIONS			
Number of motors	3		
Control box supply	200-240 VAC ; 50 / 60 Hz		
Power supply	30 VDC		
Operating power	150 W		
Cable length	25m with Swivel		
Cleaner size (L x W x h)	43 x 48 x 27 cm		
Packaging size (L x W x h)	56 x 56 x 46 cm		
Cleaner weight	9,5 kg		
Packaging weight	22,5 kg		
Filtering surface and level	1180 cm ² / 100µ		
Filtering capacity	5 L		
Inlet suction size	24,5 cm		



Spare parts p.222

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Protective cover
Reference	R0638600	R0636600	R0643700	R0568100



> ALPHA iQTM PRO

ULTRA-EFFICIENCY COMBINED WITH INTELLIGENCE



> ALPHA iQ^{TM} PRO

ULTRA-EFFICIENCY COMBINED WITH INTELLIGENCE





Personalised cleaning Sensor Nav Sytem™



Lift System: Easy-to-use and lighter removal from the water



Patented Cyclone suction



Intuitive Wi-Fi connected control

COMPARATIVE TABLE OF RANGES TECHNICAL SPECIFICATIONS		RA 6300 iQ	RA 6500 iQ	RA 6700 iQ
o of	Surfaces	Liner, polyester hull, reinforced PVC, painted concrete, tiles	Liner, polyester hull, reinforced PVC, painted concrete, tiles	Liner, polyester hull, reinforced PVC, painted concrete, tiles
Types of pools	Shapes	Rectangular, oval, free shape	Rectangular, oval, free shape	Rectangular, oval, free shape
Ϋ́	Size	12 x 6 m (18m cable)	12 x 6 m (18m cable)	15 x 7 m (21m cable)
	Traction	4 WD / 2 motors	4 WD / 2 motors	4 WD / 2 motors
	Cleaning areas	Floor / walls / waterline	Floor / walls / waterline	Floor / walls / waterline
	Cyclonic Suction	✓	√	✓
	Filtering level	60µ	60µ	60µ
nce	Filter capacity	5L	5L	5L
Ĩ.	Swivel	✓	✓	✓
Performance	Sensor Nav System™	✓	√	✓
п.	Compass	-	√	✓
	Remote control	-	in app	in app
	Pressure sensor	-	✓	✓
	Type of brushes	Contact +	Contact +	Contact +
	Number of cycles	2	Multiple	Multiple
Cycles	Cleaning cycles	Quick - Floor only Smart - Floor / Walls / Waterline	Quick - Floor only Smart - Floor / Walls / Waterline Ultra - Floor / Walls /Waterline	Quick: Floor only Smart: Floor / Walls / Waterline Ultra: Floor / Walls /Waterline Waterline only
	Manual cleaning time adjustment	-	√ .	✓
	iAqualink™ app control	✓	V	✓
	Lift System	✓	√	✓
nse	7-day timer	-	in app	in app
of u	Full filter indicator	✓	V	✓
Ease of	Transparent window	✓	V	✓
ш	Backlit filter	✓	V	✓
	Type of filter	Rigid Filter canister with top access	Rigid Filter canister with top access	Rigid Filter canister with top access
	Trolley	✓	V	✓
Advanced app features	Water temperature display	-	-	in app
Adva a feat	Spot cleaning mode		-	in app
	Warranty	4 years*	4 years*	4 years*

 $^{^{*}}$ 3 years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$



RA 6300 iQ ALPHA iQ™ PRO

Pool Cleaners > Electrics > RA 6300 iQ ALPHA iQ™ PRO

ULTRA-EFFICIENCY COMBINED WITH INTELLIGENCE

- + Sensor Nav Sytem™: intelligent and personalised cleaning
- + Ultra-powerful & long lasting suction
- + Effortless removal from water
- + Wi-fi connected : intuitive interface and advanced functionalities in app from everywhere









ÂquaLink



REFERENCE PRICE

Product reference: WR000199

ACCESSORIES INCLUDED IN THE PACK













Trolley

Control box

Ultra-Fine Filter canister 60µ

Contact + Brushes

Swivel

Free app

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m	
Pool shapes	Rectangular, oval, free shape	
All Floors	Flat, gentle slope, composite slope, diamond shape	
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete	

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	2 cycles - Quick: floor only 1h15 - Smart: floor/ walls / waterline (calculated time)	
Timer	No	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	4 wheel drive - 2 motors	
Transmission	Gear transmission	
Pressure sensor	No	
Brushes	Yes (Contact + Brushes)	
Lift System	Yes	
Transparent window	Yes	
Full filter indicator	Yes	
Remote control	No	
Water temperature measurement	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister with access over the cleaner	
Units / pallet	16	

TECHNICAL SPECIFICATIONS			
Number of motors	3		
Control box supply	200-240 VAC ; 50 / 60 Hz		
Power supply	30 VDC		
Operating power	150 W		
Cable length / Hose length	18m with Swivel		
Cleaner size (L x W x h)	43 x 48 x 27 cm		
Packaging size (L x W x h)	56 x 56 x 46 cm		
Cleaner weight	10 kg		
Packaging weight	21 kg		
Filtering surface and level	1180 cm ² / 60µ		
Filtering capacity	5 L		
Inlet suction size / Cleaned width	24,5 cm		



Spare parts p.226

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Protective cover
Reference	R0863500	R0863600	R0863700	R0568100

 $^{^{\}star}$ 3 years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$





RA 6500 iQ ALPHA iQ™ PRO

Pool Cleaners > Electrics > RA 6500 iQ ALPHA iQ™ PRO

ULTRA-EFFICIENCY COMBINED WITH INTELLIGENCE

- + Sensor Nav Sytem™: intelligent and personalised cleaning
- + Ultra-powerful & long lasting suction
- + Effortless removal from water
- + Wi-fi connected : intuitive interface and advanced functionalities in app from everywhere









AquaLink



REFERENCE PRICE

Product reference: WR000198

ACCESSORIES INCLUDED IN THE PACK













Trolley

Control box

Ultra-Fine Filter canister 60μ

Contact + Brushes

Swivel Free app

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m	
Pool shapes Rectangular, oval, free shape		
All Floors	Flat, gentle slope, composite slope, diamond shape	
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete	

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	Multiple from 0h30 to 3h30 with preset cycles: - Quick: floor only 1h15 - Smart: floor/ walls / waterline (calculated time) - Ultra: floor / walls / waterline (2h45)	
Timer	7-days	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	4 wheel drive - 2 motors	
Transmission	Gear transmission	
Pressure sensor	Yes	
Brushes	Yes (Contact + Brushes)	
Lift System	Yes	
Transparent window	Yes	
Full filter indicator	Yes	
Remote control	Remote control mode (with app)	
Water temperature measurement	No	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister with access over the cleaner	
Units / pallet	16	

TECHNICAL SPECIFICATIONS		
/ 60 Hz		
/el		
m		
m		
)μ		
)µ		



Spare parts p.228

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Protective cover
Reference	R0863500	R0863600	R0863700	R0568100

^{* 3} years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$





RA 6700 iQ ALPHA iQ™ PRO

Pool Cleaners > Electrics > RA 6700 iQ ALPHA iQ™ PRO

ULTRA-EFFICIENCY COMBINED WITH INTELLIGENCE

- + Sensor Nav Sytem™: intelligent and personalised cleaning
- + Ultra-powerful & long lasting suction
- + Effortless removal from water
- + Wi-fi connected : intuitive interface and advanced functionalities in app from everywhere









ÂquaLink



REFERENCE PRICE

Product reference: WR000197

ACCESSORIES INCLUDED IN THE PACK













Trolley

Control box

Ultra-Fine Filter canister 60μ

Contact + Brushes

Swivel

Free app

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 15 x 7 m	
Pool shapes	Rectangular, oval, free shape	
All Floors	Flat, gentle slope, composite slope, diamond shape	
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete	

DESCRIPTION		
Cleaning areas	Floor / walls / waterline	
Number / Length of cleaning cycles	Multiple from 0h30 to 3h30 with preset cycles: - Quick: floor only 1h15 - Smart: floor/ walls / waterline (calculated time) - Ultra: floor / walls / waterline (2h45) - Waterline only: 0h45	
Timer	7-days	
Power supply	Autonomous, connected to 230V mains supply before the transformer	
Steering	Pre-programmed	
Drive system	4 wheel drive - 2 motors	
Transmission	Gear transmission	
Pressure sensor	Yes	
Brushes	Yes (Contact + Brushes)	
Lift System	Yes	
Transparent window	Yes	
Full filter indicator	Yes	
Remote control	Remote control mode (with app)	
Water temperature measurement	Yes (info in app)	
Safety	Deck system, out of water safety, diagnostic, electronic motor protector	
Filtration system / access	Rigid Filter canister with access over the cleaner	
Units / pallet	16	

TECHNICAL SPECIFICATIONS		
Number of motors	3	
Control box supply	200-240 VAC ; 50 / 60 Hz	
Power supply	30 VDC	
Operating power	150 W	
Cable length / Hose length	21m with Swivel	
Cleaner size (L x W x h)	43 x 48 x 27 cm	
Packaging size (L x W x h)	56 x 56 x 46 cm	
Cleaner weight	10 kg	
Packaging weight	22,3 kg	
Filtering surface and level	1180 cm ² / 60µ	
Filtering capacity	5 L	
Inlet suction size / Cleaned width	24,5 cm	



Spare parts p.230

	Ultra-fine filter canister 60µ	Fine filter canister 100µ	Large debris filter canister 200µ	Protective cover
Reference	R0863500	R0863600	R0863700	R0568100

 $^{^{\}star}$ 3 years + 1 year if the cleaner is paired to iAqualink $^{\text{TM}}$





DIAG BOX

- + Simple system with display for off-line use (without a PC)
- + Possible out-of-water testing in off-line mode
- + Can be connected to a PC for full diagnostic check
- + Multiple light panel provided with colour coding for all products

WHICH PRODUCTS?

All Vortex[™] products (including Vortex[™]1) All Tornax[™] All CyclonX[™] products Lazernaut NT, Cybernaut[™] NT (2010 ONWARDS)

TESTED ELEMENTS?

In off-line mode: box/motor block/cable/remote control

Alpha iQ platform cannot be diagnose with the Diag Box.

The diagnostic of Alpha iQ must be performed with its own control box (by entering in Diagnostic mode. See details in the technical procedure).



PRODUCT REFERENCE

Product reference: R0685300

Robot type	Elements to be tested	Type of cable to be connected
0 1 1/71	Robot	GREY adapter
CyclonX™	Control unit	BLUE adapter
	Motor block	BROWN adapter
Vortex [™] TornaX	Robot	Robot floating cable
ЮПах	Control unit	GREEN adapter
Vortex [™] 1	Robot	RED adapter
Lazernaut, Cybernaut™ NT (>2010)	Robot (via robot control unit)	YELLOW adapter



DIAG CABLE MOTOR BLOCK

WHICH PRODUCTS?

Brown adapter (identical to the one supplied in the Diag box) to diagnose the motor block of models of Alpha iQTM range by connecting the motor directly to the control box of the cleaner.



PRODUCT REFERENCE

Product reference: R0616900



> HYDRAULIC ROBOT CLEANERS


A simple and affordable solution

	Kontiki™ 2	T3®	T5 [®] Duo	МХ6™	МХ9™
COMPARATIVE TABLE OF RANGES					
Pool Dimension max.	8 x 4 m	9 x 5 m	12 x 6 m	10 x 5 m	12 x 6 m
Number of pipes 1 m - Twist Lock pipe	8	10	12	10	12
Motion	Diaphragm	Diaphragm	Diaphragm	Mechanical	Mechanical
Suction	-	-	-	1 turbine	2 turbines with brushes
Pool floors					
Rectangular	•	•	•	•	•
Oval	•	•	•	•	•
Round		•	•	•	•
Free shape			•	•	•
Floor only	•	•			
Floor and walls			•	•	•
Flat	•	•	•	•	•
Gentle slope	•	•	•	•	•
Composit slope			•	•	•
Diamond shape					•
Minimum power required from the filtration pump	1/2 HP	1/2 HP	3/4HP	3/4 HP*	3/4 HP*
Warranty	2 years	2 years	2 years	2 years	2 years

* 1 HP needed for tile pools

STANDARD INSTALLATION

- The suction cleaner is connected directly to the vacuum point or skimmer. No electrical connection required.
- The ideal hose length for the pool equals the greatest distance that the cleaner can cover in the pool from the connection point (skimmer) to the farthest corner of the pool, plus a 1 metre section.
- For optimal installation, perform a flow test and adjust the flow rate using an adjusting valve.

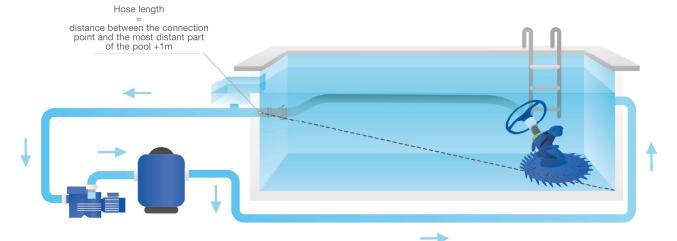



Pool Cleaners > Hydraulics > KONTIKI™ 2

- + Diaphragm: membrane technology
- + Finned disc: optimum mobility of the cleaner







REFERENCE PRICE

Product reference: W70478

ACCESSORIES INCLUDED IN THE PACK





Adaptors (x2)

Hose deflectors (x2)

FOR WHICH TYPE OF POOLS?

Types of pools	Private above-ground pools with rigid walls, maximum 8 x 4 m	
Pool shapes	Rectangular, oval	
All Floors	Flat, gentle slope	
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete	

DESCRIPTION		
Cleaning areas	Floor	
Cleaning cycles	Recomended 6h filtering in three 2h sessions	
Power supply	Filtering group	
Steering	Random	
Installation	Suction line or skimmer	
Motion	Diaphragm	
Types of debris handled	Fine and medium	
Units / pallet	24	

TECHNICAL SPECIFICATIONS		
Hose length	8 sections of 1 m	
Cleaner size (L x W x h)	48 x 20 x 40 cm	
Packaging size (L x W x h)	101 × 31,5 × 33 cm	
Cleaner weight	1,3 kg	
Packaging weight	5,5 kg	
Filtering capacity	Pool filtering circuit	
Cleaned width	40 cm	
Displacement speed	6 m/min	
Minimum required filter pump power	1/2 HP	



		THE THE PARTY WITH THE PARTY WAS A PARTY W	
	6 sections of 1 m	Flow gauge	Flowkeeper valve
Reference	W69100	W70335P	W60055P



Pool Cleaners > Hydraulics > T3®

- + DiaCyclone Diaphragm: even more powerful suction
- + Finned disc: optimum mobility of the cleaner







REFERENCE PRICE

Product reference: W70674

ACCESSORIES INCLUDED IN THE PACK









Twist Lock Hoses

Wheel deflector

Flow gauge

Flowkeeper valve (skimmer)

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 9 x 5 m	
Pool shapes	Rectangular, oval	
All Floors	Flat, gentle slope	
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete	

DESCRIPTION		
Floor		
Recomended 6h filtering in three 2h sessions		
Filtering group		
Random		
Suction line or skimmer		
Diacyclone Diaphragm		
Fine and medium		
27		

TECHNICAL SPECIFICATIONS		
Hose length	10 sections of 1 m	
Cleaner size (L x W x h)	41 x 36 x 28 cm	
Packaging size (L x W x h)	102,8 x 41,5 x 22,4 cm	
Cleaner weight	1,2 kg	
Packaging weight	6,8 kg	
Filtering capacity	Pool filtering circuit	
Cleaned width	30 cm	
Displacement speed	6,5 m/min	
Minimum required filter pump power	1/2 HP	



OPTIONAL ACCESSORIES (NOT INCLUDED) 6 section of 1m Twist Lock hoses Reference W78055





Pool Cleaners > Hydraulics > T5®Duo

- + DiaCyclone Diaphragm: even more powerful suction
- + Flexible Duo Traction Control disc in 2 parts: optimum grip









REFERENCE PRICE

Product reference: W78046

ACCESSORIES INCLUDED IN THE PACK









Twist Lock Hoses

Wheel deflector

Flow gauge

Flowkeeper valve (skimmer)

FOR WHICH TYPE OF POOLS?		
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m	
Pool shapes	Rectangular, oval, free shape	
All Floors	Flat, gentle slope, composite slope	
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete	

DESCRIPTION		
Cleaning areas	Floor and walls	
Cleaning cycles	Recomended 6h filtering in three 2h sessions	
Power supply	Filtering group	
Steering	Random	
Installation	Suction line or skimmer	
Motion	Diacyclone Diaphragm	
Types of debris handled	Fine and medium	
Units / pallet	24	

TECHNICAL SPECIFICATIONS		
Hose length	12 sections of 1 m	
Cleaner size (L x W x h)	44 x 43 x 22 cm	
Packaging size (L x W x h)	99 × 45,5 × 29,5 cm	
Cleaner weight	1,4 kg	
Packaging weight	8,4 kg	
Filtering capacity	Pool filtering circuit	
Cleaned width	44 cm	
Displacement speed	6 m/min	
Minimum required filter pump power	3/4 HP	



OPTIONAL ACCESSORIES (NOT INCLUDED)	
	6 section of 1m Twist Lock hoses
Reference	W78055



Pool Cleaners > Hydraulics > MX6™

- + Pre-programmed X-Drive navigation system : methodical cleaning of all areas
- + Turbo aspiration: a powerful turbine and one peripheral propeller
- + Traction using notched tracks: for perfect stability and total movement
- + Equipped with a flow regulator valve: automatically controls excess flow through cleaner for best performance and longevity





REFERENCE PRICE

Product reference: W79102

ACCESSORIES INCLUDED IN THE PACK













Twist Lock Hoses

In-ground valve cuff

45° Elbow extended

45° Elbow

Flow Regulator Valve (cleaner)

Flowkeeper valve (skimmer)

FOR WHICH TYPE OF POOLS?	
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 10 x 5 m
Pool shapes	Rectangular, oval, free shape
All Floors	Flat, gentle slope, composite slope
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete

DESCRIPTION		
Cleaning areas	Floor and walls	
Cleaning cycles	Recomended 6h filtering in three 2h sessions	
Power supply	Filtering group	
Steering	Random	
Installation	Suction line or skimmer	
Motion	Mechanical suction : turbine	
Types of debris handled	Fine and medium	
Units / pallet	30	

TECHNICAL SPECIFICATIONS	
Hose length	10 sections of 1 m
Cleaner size (L x W x h)	31 x 19 x 22 cm
Packaging size (L x W x h)	102 x 23 x 37 cm
Cleaner weight	2,5 kg
Packaging weight	8,2 kg
Filtering capacity	Pool filtering circuit
Cleaned width	25 cm
Displacement speed	8 m/min
Minimum required filter pump power	3/4 HP (1 HP forTile pools)



Spare parts p.252

(
	6 section of 1m Twist Lock hoses	Cyclonic™ Leaf Catcher
Reference	W78055	W37110





Pool Cleaners > Hydraulics > MX9™

- + Pre-programmed X-Drive navigation system: methodical cleaning of all areas
- + Turbo aspiration: a powerful turbine and two peripheral propellers with brushes
- + Exclusive cleaning mode thanks to scrubbing brushes
- + Traction using notched tracks: for perfect stability and total movement
- + Twist Lock Hoses : easy and safe connection





REFERENCE PRICE

Product reference: WS000033

ACCESSORIES INCLUDED IN THE PACK















Cyclonic scrubbing brushes

Twist Lock Hoses

In-ground valve

45° Elbow extended

45° Elbow

Flow Regulator Valve (cleaner)

Flowkeeper valve (skimmer)

FOR WHICH TYPE OF POOLS?	
Types of pools	Private in-ground pools and above-ground pools with rigid walls, maximum 12 x 6 m
Pool shapes	Rectangular, oval, free shape
All Floors	Flat, gentle slope, composite slope
Pool surfaces	Tiles liner polyester hull reinforced PVC painted concrete

DESCRIPTION	
Cleaning areas	Floor and walls
Cleaning cycles	Recomended 6h filtering in three 2h sessions
Power supply	Filtering group
Steering	Random
Installation	Suction line or skimmer
Suction system	Mechanical suction : turbine
Types of debris handled	Fine and medium
Units / pallet	30

TECHNICAL SPECIFICATIONS	
Hose length	12 sections of 1 m
Cleaner size (L x W x h)	41 x 19 x 22 cm
Packaging size (L x W x h)	102 x 23 x 37 cm
Cleaner weight	3,2 kg
Packaging weight	9,5 kg
Filtering capacity	Pool filtering circuit
Cleaned width	36cm
Displacement speed	8 m/min
Minimum required filter pump power	3/4 HP (1 HP forTile pools)



Spare parts p.254

OPTIONAL ACCESSORIES (NOT INCLUDED)		
	6 section of 1m Twist Lock hoses	Cyclonic™ Leaf Catcher
Reference	W78055	W37110





Pool Cleaners > Hydraulics > Cyclonic™ Leaf Catcher

- + Cyclone suction system: constant suction and dirt remains in suspension
- + no pressure on the pump
- + Large, transparent, easy-to-empty filter basket
- + Fits all hose types





REFERENCE PRICE

Product reference: W37110

ACCESSORIES INCLUDED IN THE PACK






Standard hose and Twist Lock hose adaptors

DESCRIPTION	
Installation	Suction line or skimmer
Types of debris handled	All debris

TECHNICAL SPECIFICATIONS	
Cleaner size (L x W x h)	23 x 19 x 28 cm
Packaging size (L x W x h)	24 x 20 x 29 cm
Cleaner weight	1 kg
Packaging weight	1,3 kg

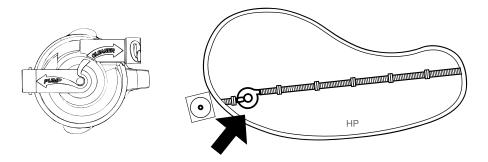

Install at the first hose connection closest to skimmer/or suction line. Ensure correct orientation using guides (Pump/Cleaner) on Leaf Catcher lid.





Pool Cleaners > Hydraulics > Spa Wand

- + Targeted cleaning of small volumes : spa, steps...
- + Efficient and easy to use handheld brush and no connection required
- + Debris are collected in a separate stainless steel filter







REFERENCE PRICE

Product reference: W9320018

ACCESSORIES INCLUDED IN THE PACK







Steel filter

2 sweeping nozzles

Wall bracket

FOR WHICH TYPE OF POOLS?	
Types of pools	Private above ground and above-ground pools with rigid walls, spas, steps, overflow gutters, integrated filtering blocks
Pool shapes	Rectangular, oval, free shape
All Floors	Flat, gentle slope, composite slope
Pool surfaces	Tiles, liner, polyester hull, reinforced PVC, painted concrete


DESCRIPTION		
Power supply	Manual brush	
Installation	Suction line or skimmer	
Types of debris handled	Dust, insects, gravel, leaves,	

TECHNICAL SPECIFICATIONS			
Cleaner size (L x W x h)	7 x 7 x 144 cm		
Packaging size (L x W x h)	8 x 9 x 146 cm		
Cleaner weight	1,2 kg		
Packaging weight	1,7 kg		



Spare parts p.256









Double function nozzle: specially designed for debris at the bottom and corners.

44 ZPCE 2021




Polaris®

INTRODUCTION	p.46
• Polaris® 280	p.47
• Polaris® 3900 Sport	p.48
 Polaris[®] QUATTRO™ Sport 	p.49
• Polaris® Tail Sweep Pro	p.50
Booster Pump & Control Box	p.51

POLARIS®



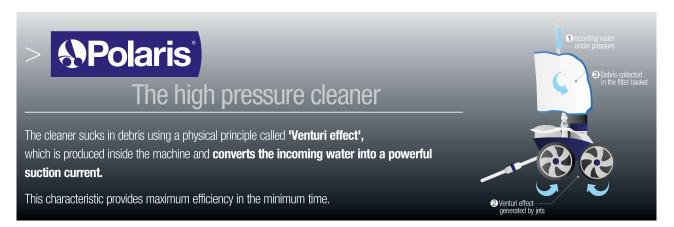


EQUIPMENT NEEDED

- The pipes of the vacuum point must be made of RIGID 16 bar PVC and not flexible material
- Booster, minimum 1 HP coupled to filtration


For optimum operation, advise your customers to equip their pools with an electrical programming box and a Polaris® booster. This guarantees complete compatibility and ideal suction power.

• Minimum operating pressure 1.8 bar

STANDARD INSTALLATION

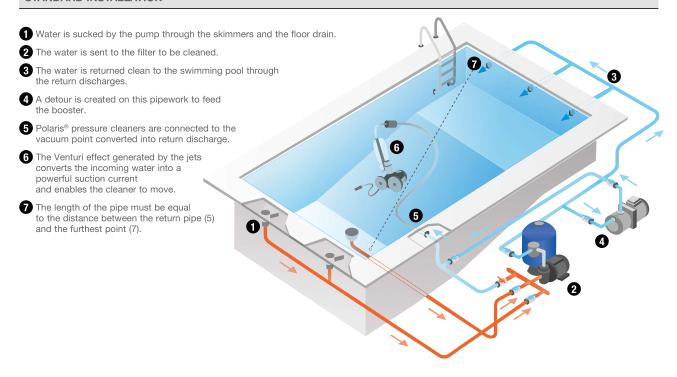

INSTALLATION OF THE PIPE





- + 2 jets, ultra-powerful suction + Wide suction aperture
- Automatic back-up valve, anti-jamming.





REFERENCE

W7220000

ACCESSORIES INCLUDED IN THE PACK







Back-up valve

EOD	WHICH	TVDE	OF	POOLS

Types of pool	Private in-ground pools
Pool shapes	All shapes
Bottoms	Flat bottom, gentle slope, composed slope, diving pit, diamond point
Surfaces	Liner

DESCRIPTION	
System type	Pressure cleaner
Steering	Random and automatic reverse
Power supply	Booster pump coupled to filtering
Suction	2 jets Venturi system
Debris collection	Filter bag + sweep hose scrubber

TECHNICAL SPECIFICATIONS			
Required equipment*	1 HP booster pump		
Operating pressure	2,2 bars		
Specific brush socket line	Fixed hose 16 bars		
Speed	15 m / min		
Suction size	7 cm		
Hose length	9,60 m		
Weight	3,2 kg		
Units / pallet	36		
Weight	3,2 kg		



Spare parts p.260

	NPolaris				
	Disposable bags (EZ Bag) (packs of 6)	Standard silt bag	Leaf bag	Ultra fine bag	
Ref. Polaris	K-52	K-13	K-15	K-14	
Ref. Zodiac	W7230114	W7230102	W7230104	W7230103	

^{*}Depending on the distance to the technical room





- + 3 jets, ultra-powerful suction
- 3 wheel drive fitted with wide tyres
- Automatic back-up valve, anti-jamming
- Stainless steel chain, highly reliable gear system.





REFERENCE

W7620000

ACCESSORIES INCLUDED IN THE PACK







Ultra-fine filter bag



Back-up valve



Tail Sweep Pro

FOR WHICH TYPE OF POOLS

Types of pool	Private in-ground pools
Pool shapes	All shapes
Bottoms	Flat bottom, gentle slope, composed slope, diving pit, diamond point
Surfaces	Liner

DESCRIPTION	
System type	Pressure cleaner
Steering	Random and automatic reverse
Power supply	Booster pump coupled to filtering
Suction	3 jets Venturi system

TECHNICAL SPECIFICATIONS			
1 HP booster pump, 1.5 HP booster pump and greater **			
2,2 to 2,6 bars max			
Fixed hose 16 bars			
20 m / min			
6 cm			
9,60 m			
3,5 kg			
16			



Spare parts p.264

OPTIONAL ACCESSORIES (NOT INCLUDED)

	Special States				
	Disposable bags (EZ Bag) (packs of 6)	Standard, double capacity silt bag	Standard silt bag	Leaf bag	Ultra fine bag
Ref. Polaris	K-52	39-310	K-23	K-15	K-18
Ref. Zodiac	W7230114	W7610000	W7230111	W7230104	W7230109

Filter bag + sweep hose scrubber



Debris collection

^{*}Depending on the distance to the technical room
**For a technical room at a distance of more than 15 m. For a perfect use of your pressure cleaner, we recommend to use it with a 1.5 HP booster pump and greater

♦Polaris **□ □ △**

- + 3 jets, ultra-powerful suction
- Large debris intake
- Multi-directional navigation Dual-stage filtration









REFERENCE

WE000028

ACCESSORIES INCLUDED IN THE PACK



Dual stage filter canister 3.5L

FOR WHICH TYPE OF POOLS Types of pool Private in-ground pools Pool shapes All shapes Bottoms Flat bottom, gentle slope, composed slope, diving pit, diamond point Liner, polyester hull, reinforced PVC, painted concrete* Surfaces

DESCRIPTION	
System type	Pressure cleaner
Steering	Random and multi-directional
Power supply	Booster pump coupled to filtering
Suction	3 jets Venturi system
Debris collection	Rigid dual canister / Access over the cleaner

TECHNICAL SPECIFICATIONS		
Required equipment*	1 HP booster pump, 1.5 HP booster pump and greater **	
Operating pressure	2,2 bars	
Specific brush socket line	Fixed hose 16 bars	
Speed	16 m / min	
Suction size	7 cm	
Hose length	9,60 m	
Weight	6.8 kg	
Units / pallet	20	



Spare parts p.258

ACCESSOIP	RES DISPONIBLES EN OPTION	
i	All-purpose filter canister	Fine filter canister
Reference	R0836300	R0836400

^{*} For better grip of your cleaner on slippery surfaces, replace the 2 original rear tires with Positrax tires
** For a technical room at a distance of more than 15 m. For a perfect use of your pressure cleaner, we recommend to use it with a 1.5 HP



Polaris > Pressure cleaner > Tail Sweep pro

- + Optimized removal of debris in the pool
- ► Reduced water spraying around the pool
- Easy to install at the end of the flexible hose of Polaris® robot cleaners
- + Suitable for all models of Polaris® pressure cleaners





	18 units Display	Case of 12 units
REFERENCE		
Standard model	W7220031	W7220032


Standard model	W7220031		W7220032	
ACCESSORIES INCLUDED	O IN THE PACK			
3				
	Foam brush		Tail sweep	

TECHNICAL SPECIFICATIONS		
Dimensions of the accessory (L x D x h)	10 x 5 x 5 cm	
Packaging dimensions (L x D x h)	11 x 5 x 5 cm	
Weight of the accessory	21 g	
Packaged weight	39 g	

GENERAL SPECIFICATIONS

Installation

By the user, on the end of the flexible hose of the pressure cleaner



In the water :

The Trail Sweep Pro^{\circledcirc} side inlets are used to suck in the water which is re-injected by Venturi effect into the diffuser :

- Increased flow rate
- Optimised removal of debris

Side inlets for water suction or air suction



Diffuser for water dispersion



Out of the water :

As soon as these inlets emerge from the water, the air which is sucked in cuts the injection of water to avoid water being sprayed outside the pool.





12

10

Booster Pump & Control box

Polaris > Booster pump & Electric box

- + All water treatment adapted (sea water, chlorine water, demineralized water...)
- + Distance from the pool up to 20 meters
- + Connection kit "Quick Connect" includ in the BPK pack





Booster pump without connexion kit

Booster pump with connexion kit

REFERENCE		
Standard model	BP / W4530247	BPK / W4530248

GENERAL	
Power	1 CV single phase
Туре	Multicellular
Body and turbine	Noryl®
Composition	Pump + Kit Quick Connect (BPK)
Weight	11 kg
Guarantee	2 years

TECHNICAL SPECIFICATIONS		
Supply voltage	220-240 V	
Consumption	0,75 kW	
Turbine shaft	Inox AISI 420	
RPM	2800 rpm	
Bust of AMP	5,3 A	
Protection index	Watertightness IP-55	

- + Ideal to be combined with Polaris Cleaners
- + Easy to program
- + Magnetic-thermal breaker to protect the system



Electric box

REFERENCE PRICE	
Standard model	CE-2001 / W2520001

GENERAL	
Size	L. 220 x I. 200 x H. 200 mm
Weight	1 kg
Guarantee	2 years

TECHNICAL SPECIFICATIONS		
Electrical supply	1 ph 230 V / 50 Hz	
Circuit breaker	4 to 6,3 A	
Switch main power	Auto / stop / manual	
Protection index	Watertightness IP-65	
Installation	30 mA	